

Spring-return actuator, combined with thermoelectric tripping device (72 °C), for fire and smoke dampers 90° in ventilation and air-conditioning systems

- Nominal torque 18 Nm / 12 Nm
- Nominal voltage AC/DC 24 V
- Control open-close
- Damper rotation form fit 12 mm (10 mm with enclosed adapter)


Technical data

| | | |
|--------------------------------------|---|--|
| Electrical data | Nominal voltage | AC/DC 24 V |
| | Nominal voltage frequency | 50/60 Hz |
| | Nominal voltage range | AC 19.2 V ... 28.8 V / DC 21.6 V ... 28.8 V |
| | Power consumption in operation | 7 W |
| | Power consumption at rest | 2 W |
| | Power consumption for wire sizing | 10 VA |
| | Power consumption for wire sizing note | I _{max} 8.3 A @ 5 ms |
| | Auxiliary switch | 2 x SPDT |
| | Switching capacity auxiliary switch | Contact gold-plated silver: 1 mA ... 6 (3) A, DC 5 V ... AC 250 V (II Totally insulated) |
| | Switching points auxiliary switch | 5° / 80° |
| | Connection supply | Cable 1 m, 2 x 0.75 mm ² (halogen-free) |
| | Connection auxiliary switch | Cable 1 m, 6 x 0.75 mm ² (halogen-free) |
| | Cable length thermoelectric tripping device | 1 m |
| | Functional data | Torque motor |
| Torque spring-return | | Min. 12 Nm |
| Direction of rotation motor | | Can be selected by mounting L / R |
| Angle of Rotation | | max. 95° (incl. 5° initial spring tension) |
| Running time motor | | <120 s / 90° |
| Running time spring-return | | ~16 s (t _{amb} =20 °C) |
| Sound power level motor max. | | 45 dB (A) |
| Sound power level spring-return max. | | 63 dB (A) |
| Damper rotation | | Form fit 12 mm (10 mm with enclosed adapter) |
| Position indication | | Mechanically, with pointer |
| Service life | | Min. 60,000 safety positions |
| Safety | Response temperature thermal fuse | Tf1: Duct outside temperature 72 °C Tf2 and Tf3: Duct inside temperature 72 °C |
| | Protection class IEC/EN | III Safety extra-low voltage |
| | Degree of protection IEC/EN | IP54 in all mounting positions |
| | EMC | CE according to 2004/108/EC |
| | Low-voltage directive | CE according to 2006/95/EC |
| | Certification IEC/EN | Certified according to IEC/EN 60730-1 and IEC/EN 60730-2-14 |
| | Mode of operation | Type 1.AA.B |
| | Rated impulse voltage supply / control | 0.8 kV |
| | Control pollution degree | 3 |
| | Ambient temperature normal duty | -30 °C ... 50 °C |
| | Ambient temperature safety duty | The safety position will be attained up to max. 75 °C |
| | Non-operating temperature | -40 °C ... 50 °C |
| | Ambient humidity range | 95% r.h., non-condensing |
| | Maintenance | Maintenance-free |
| Weight | Weight approx. | 2.8 kg |

Safety notes



- The actuator is not allowed to be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- The actuator is adapted and mounted to the fire and smoke damper by the damper manufacturer. For this reason, the actuator is only supplied direct to safety damper manufacturers. The manufacturer then bears full responsibility for the proper functioning of the damper.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Product features

| | |
|---------------------------------------|---|
| Mode of operation | The actuator moves the damper to the operating position at the same time as tensioning the return spring. The damper is turned back to the safety position by spring energy when the supply voltage is interrupted. |
| Thermoelectric tripping device | If the ambient temperature of 72°C is exceeded, the thermal fuse Tf1 responds. If the duct inside temperature of 72°C is exceeded, the exchangeable thermal fuse Tf2/Tf3 will respond. When the thermal fuses Tf1, Tf2 or Tf3 respond, the supply voltage is interrupted permanently and irreversibly. The LED is lit when <ul style="list-style-type: none"> – there is a supply voltage, – the temperature fuses are OK and – the test switch is not pressed. The function of the thermal fuse and the test button is only warranted if the actuator is connected to the power supply and has reached its operating position (LED on). |
| Signalling | Two microswitches with fixed settings are installed in the actuator for indicating the damper end positions. The position of the damper blade can be read off on a mechanical position indication. |
| Manual operation | Without power supply, the damper can be operated manually and fixed in any required position. It can be unlocked manually or automatically by applying the supply voltage. |

Accessories

| | Description | Data sheet name |
|-------------------------------|---|-----------------|
| Electrical accessories | Auxiliary switch, 2 x SPDT, 6 A (2.5 A), AC 250 V | SN2-C7 |
| | Cable set with plug, L = 0.5 m for BF.. and BLF.. at communication and power supply units | ZST-BS |
| | Blanking cover (has no duct sensor function) for BAE.. | ZBAE0 |
| | Spare thermoelectric tripping device for BAE..., duct inside temperature 72°C | ZBAE72 |
| | Spare thermoelectric tripping device for BAE..., duct inside temperature 95°C, colour green | ZBAE95 |
| Mechanical accessories | Adapter with clamp for rotary axes up to 20 mm for BF.. and BLF.. | ZK-BF |
| | Adapter with DM18 rotary axis, L = 33 mm for BF.. and BLF.. | ZA18-BF |
| | Adapter 12/8 mm for BF.. and BLF.. | ZA8-BF |
| | Adapter 12/11 mm for BF.. and BLF.. | ZA11-BF |
| | Bracket for SN2-C7 auxiliary switch for BF.. and BR.. | ZSN-BF |

Electrical installation




Notes

- Connection via safety isolating transformer.
- Parallel connection of other actuators possible. Note the performance data.

Wiring diagrams

AC/DC 24, open-close

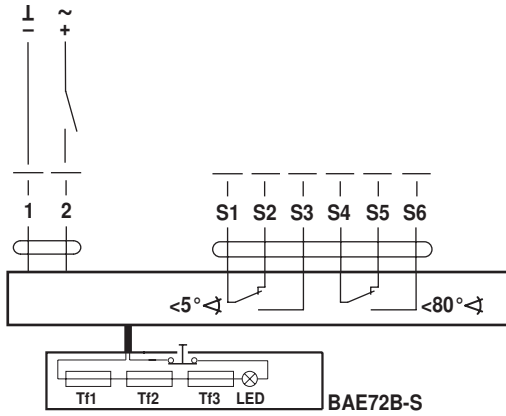

Cable colours:

- 1 = black
- 2 = white

- S1 = white
- S2 = white
- S3 = white
- S4 = white
- S5 = white
- S6 = white

Dimensions [mm]

Dimensional drawings

