

Big Foot Rapid Walkway

Safe access for on going maintenance and inspection of plant and services

Typical Application

The Big Foot Rapid Walkway is ideal for establishing clear, safe pathways around installations on a flat roof. It offers a secure route for service engineers to gain access to plant and for managing the flow of other personnel. The metalwork is galvanised to withstand the year-round elements on a roof, and the gritted top to the Walkway grating provides a permanent non-slip surface in any weather. The Big Foot Rapid Walkway system utilises Fix-it Foot feet.


This beautifully simple Walkway system is supported on recycled rubber blocks. Rapid Walkway systems are supplied from stock and are quick and easy to install on site.

Custom Walkway

Big Foot Systems will be happy to specify a Walkway designed specially to meet your needs. All you need to do is provide accurate drawings of the flat roof and its existing installations and we will supply you with a planned layout and quote.

Technical Information

Section Model	Part No.	Length outside of metalwork (mm)	Width of walkable section (mm)	Width outside of Fix-it Foot (mm)	Height to walkway surface (mm)	Height to top of handrail (mm)	Approx. Weight (kg)
Single Corner	B9104	1496	1018	1230	130	n/a	42
1m Length	B9105	1000	1018	1230	130	n/a	32
2m Length	B9106	2000	1018	1230	130	n/a	58
3m Length	B9107	3000	1018	1230	130	n/a	85
1m Handrail	B9111	1000	n/a	n/a	n/a	1130	9
2m Handrail	B9112	2000	n/a	n/a	n/a	1130	12
3m Handrail	B9113	3000	n/a	n/a	n/a	1130	15
T Junction	B9143	n/a	n/a	n/a	n/a	1130	65

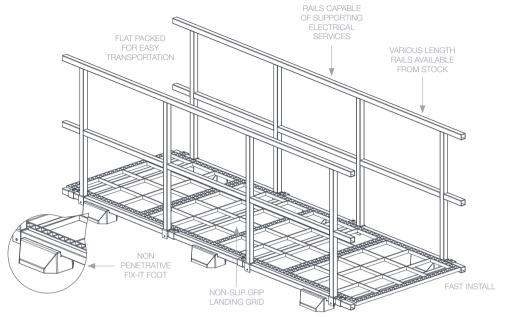

Material Specification

FIX-IT FOOT

SBR-Recycled Rubber. Bound using a ratio of high quality moisture curing Polyurethane Pre-Polymer. BS7188:1989 & BS5696 Part 3:1979

METAL FRAMEWORK

Hot Dip Galvanised Mild Steel: BS EN 10219-1:1997. Welding Standard: BS EN ISO 15614-1 Galvanising: BS EN ISO 1461:1999 Salt Mist Testing: BSEN60068-2-52 Test Kb Severity 1

WORKING CONDITIONS

Suitable for internal or external applications in temperatures between -40°C to +80°C



Ideal for walkways and to protect roof surfaces, with underside detail to allow for small debris on roof.

Part No.	Height (mm)	Width (mm)	Length (mm)
B6416	45	500	500