




## Photo

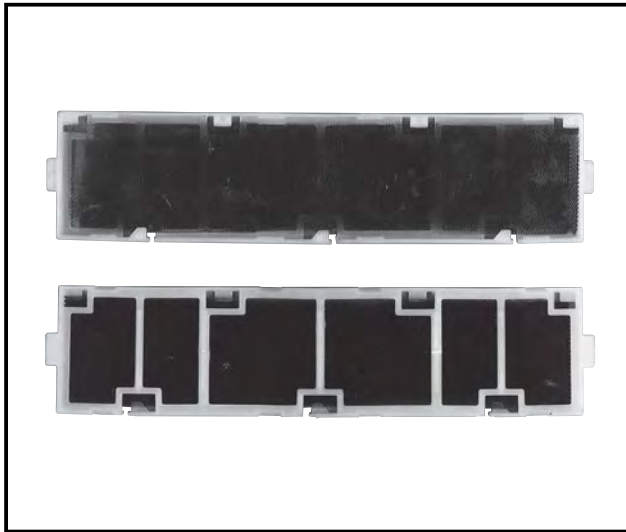

## Descriptions

The catalyst coating on the honeycomb-structured frame captures small foul-smelling substances in the air, then breaks down the source of the odors with the power of the ozone generated in a plasma electrode unit.

## Applicable Models


- MSZ-FH25VE
- MSZ-FH35VE
- MSZ-FH50VE

## Specifications

Material	Filter: Aluminium Catalyst: MnO <sub>2</sub> , SiO <sub>2</sub> Frame: Polypropylen
Color (Filter)	Black


## Dimensions

Unit : mm

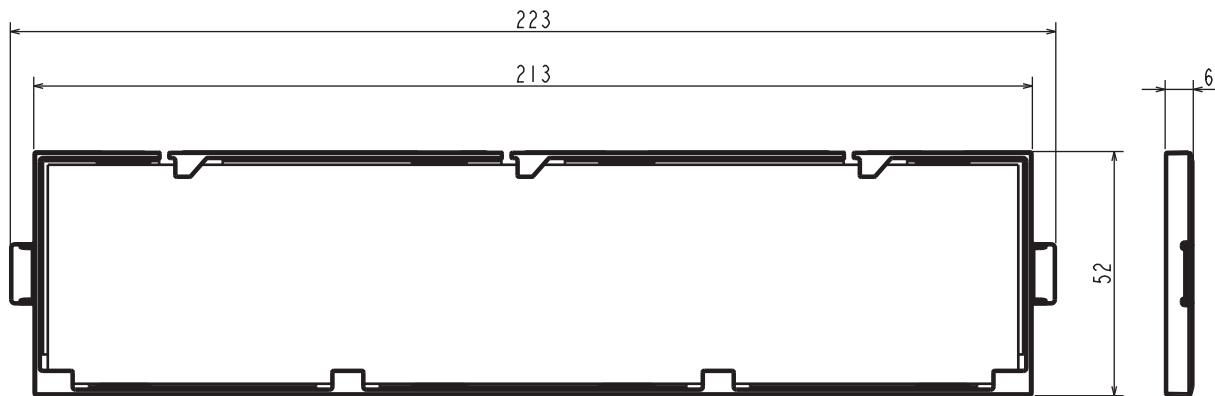


## How to Use / How to Install

### Replacement of the air cleaning filter



1. Lift the front panel until a "click" is heard.
2. (1) Remove the air filter.  
(2) Remove the air cleaning filter.  
(3) Install a new air cleaning filter.  
(4) Install the air filter.
3. Close the front panel securely and press the positions indicated by the arrows.




Every 3 months:

- Remove dirt by a vacuum cleaner, or soak the framed filter in lukewarm water (30 to 40°C) for about 15 minutes. Rinse well.
- After washing, dry it well in shade.
- Deodorizing feature recovers by cleaning the filter.

**When dirt or smell cannot be removed by cleaning:**

- Replace it with a new air cleaning filter.



Pull to remove from the air filter

OPTIONAL PARTS