




Photo

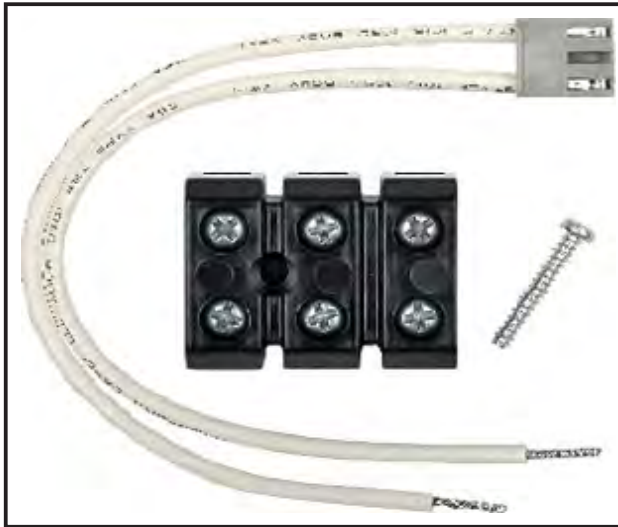

Descriptions


Connector for drain hose heater.

Applicable Models

- PUAZ-SHW80,112VHA
- PUAZ-SHW112,140YHA
- PUAZ-SHW230YKA2

Contents


① Terminal block ×1



② Screw ×1




③ Lead wire with connector ×1

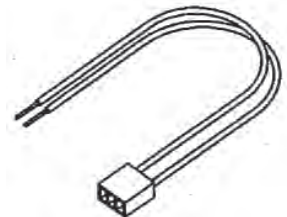


Installation

PUHZ-SHW80/112VHA

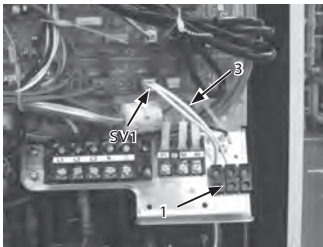


PUHZ-SHW112/140YHA,
PUHZ-SHW230YKA2

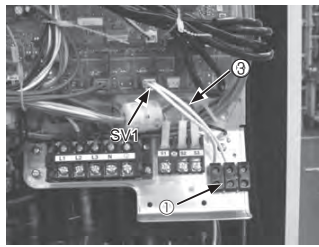

1. Attach the terminal block ①, with the screw ②.
2. Connect the lead wire ③ connector side to SV1 port on the outdoor controller board.
3. Connect the lead wire ③ to the terminal block ①.
4. Wire local cables for a drain hose heater RELAY to the terminal block ①.

- Drain hose heater RELAY connection only
- MAX current 1

Connection diagram

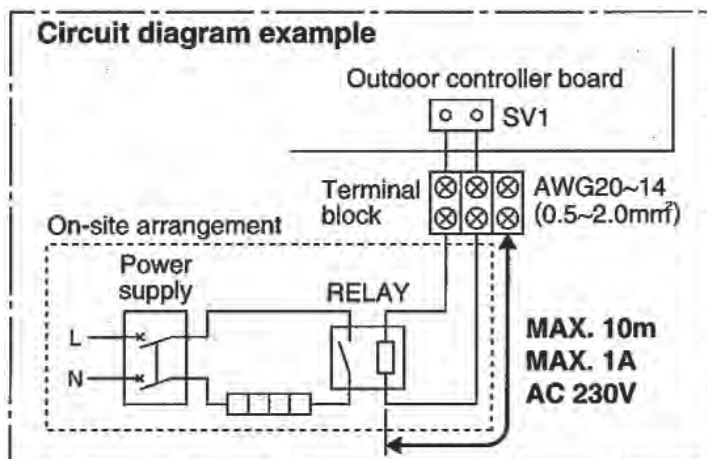

SV1 on the controller board
 → Drain hose heater signal output
 With PAC-SE60RA-E
 From defrost start
 For 15 min. ON signal provided