



AGS5000/6000

Air curtain for doors in industrial and large premises, with intelligent control

- Installation height up to 6 metres*
- Horizontal mounting
- Lengths: 1, 1,5, 2, 2,5 and 3 metres

- ✿ Ambient, no heat
- 💧 Water heat WL

Application

AGS5000/6000 is a powerful air curtain intended for industrial doors but it can also be used for entryways in other large premises such as shopping malls.

With its many clever, energy saving functions, the air curtain gives effective protection, specially adapted for your door.


Design

AGS5000/6000 has a timeless, clean design. The air curtain is intended for horizontal installation, models for vertical and recessed installation are available for special order.



Optimized airflow with Thermozone technology.

Air velocity profile

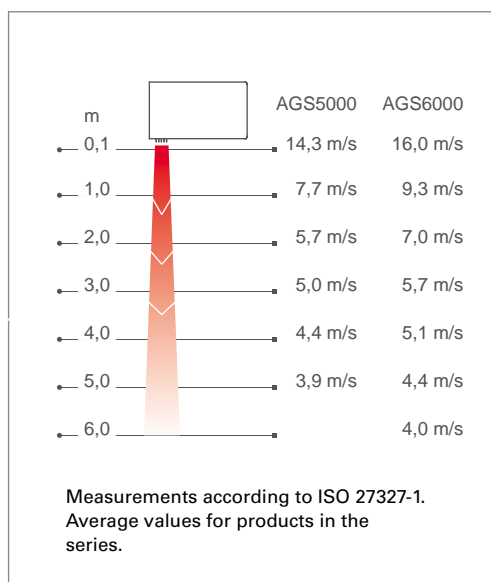

Product specifications

- Prepared for the SIRE control system whose pre-programmed default settings and many features make it easy to install and use the air curtain. Read more about the SIRE controls package in the "Controls" section.
- The following models of AGS5000/6000 are available for special order:
 - with electrical heating
 - with water coil WH for high water temperatures
 - with alternative water connections
 - for vertical installation
 - for recessed installation in suspended ceilings
- Intake grilles that can be opened make it easy to access the water coil. The grille is easy to clean from the outside.
- Adjustable exhaust grille makes it possible to direct the air for optimum air curtain effect.
- Corrosion proof housing made of hot zinc-plate and powder enamelled steel panels. Colour: white, RAL 9016, NCS S 0500-N. Colour grille: grey, RAL 7046.

2 *) Recommended installation height varies depending on the relevant premises.

Technical specifications

✿ Ambient, no heat - AGS5000/6000 A

Type	Output [kW]	Airflow [m ³ /h]	Sound level* ¹ [dB(A)]	Voltage motor [V]	Amperage motor [A]	Length [mm]	Weight [kg]
AGS5015A	0	2650/5300	48/67	230V~	5,4	1515	100
AGS5020A	0	3800/7600	50/69	230V~	8,1	2010	130
AGS5025A	0	5100/10200	52/71	230V~	10,8	2520	165
AGS5030A	0	6000/12000	53/72	230V~	13,3	3030	195
AGS6010A	0	2350/4700	48/67	230V~	5,0	1010	80
AGS6015A	0	3550/7100	50/69	230V~	7,5	1515	115
AGS6020A	0	4650/9300	51/70	230V~	9,5	2010	145
AGS6025A	0	5800/11600	52/71	230V~	12,2	2520	180
AGS6030A	0	6500/13000	54/73	230V~	14,2	3030	210

💧 Water heat - AGS5000/6000 WL, coil for low water temperature (≤ 80 °C)

Type	Output* ³ [kW]	Airflow [m ³ /h]	Δt * ^{2,3} [°C]	Water volume [l]	Sound level* ¹ [dB(A)]	Voltage motor [V]	Amperage motor [A]	Length [mm]	Weight [kg]
AGS5015WL	25,0	2400/4800	20/16	4,0	47/66	230V~	5,2	1515	120
AGS5020WL	41,4	3500/7000	22/18	8,1	49/68	230V~	7,8	2010	155
AGS5025WL	53,7	4700/9400	21/17	9,2	50/69	230V~	10,4	2520	195
AGS5030WL	64,6	5800/11600	21/17	11,0	52/71	230V~	12,8	3030	235
AGS6010WL	24,5	2100/4200	22/17	3,8	47/66	230V~	4,8	1010	95
AGS6015WL	29,9	3250/6500	18/14	4,0	49/68	230V~	7,2	1515	135
AGS6020WL	46,7	4250/8500	21/16	8,1	50/69	230V~	9,1	2010	170
AGS6025WL	57,7	5300/10600	21/16	9,2	51/70	230V~	11,7	2520	210
AGS6030WL	68,0	6300/12600	21/16	11,0	53/72	230V~	13,6	3030	250


*¹) Conditions: Distance to the unit 5 metres. Directional factor: 2. Equivalent absorption area: 200 m². At lowest/highest airflow.

*²) Δt = temperature rise of passing air at maximum heat output and lowest/highest airflow.

*³) Applicable at water temperature 60/40 °C, air temperature, in +18 °C.

Protection class: IP23.
CE compliant.

Dimensions

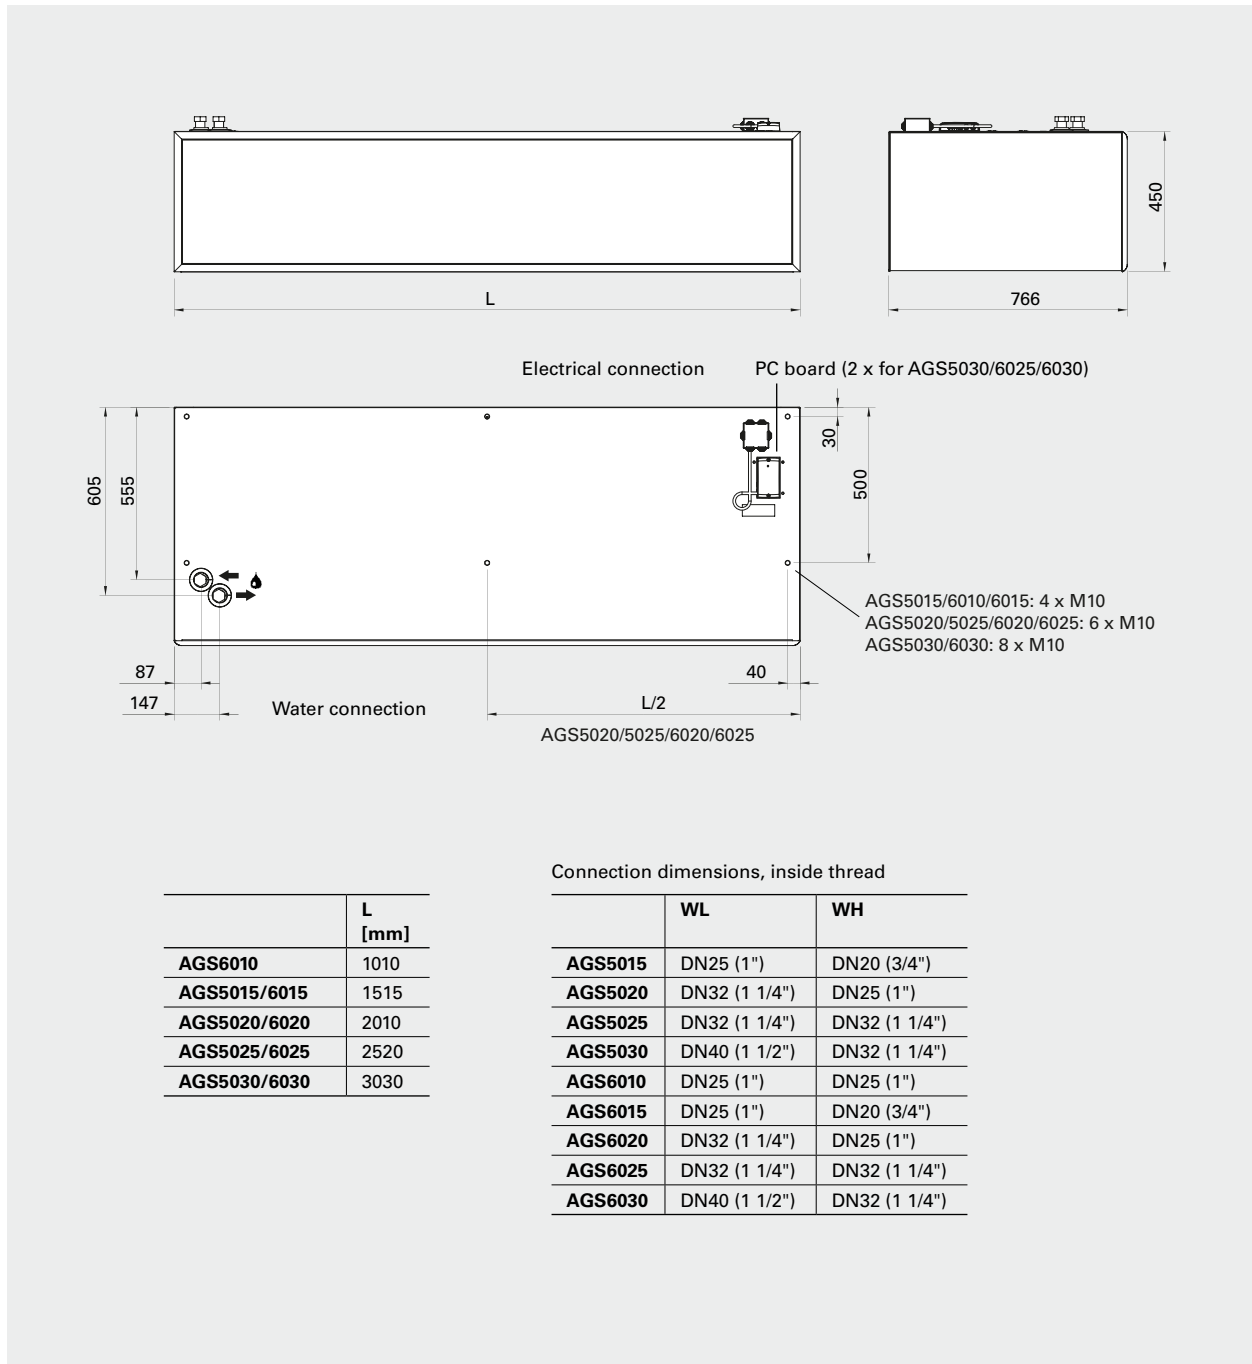

	L [mm]
AGS6010	1010
AGS5015/6015	1515
AGS5020/6020	2010
AGS5025/6025	2520
AGS5030/6030	3030

Connection dimensions, inside thread

	WL	WH
AGS5015	DN25 (1")	DN20 (3/4")
AGS5020	DN32 (1 1/4")	DN25 (1")
AGS5025	DN32 (1 1/4")	DN32 (1 1/4")
AGS5030	DN40 (1 1/2")	DN32 (1 1/4")
AGS6010	DN25 (1")	DN25 (1")
AGS6015	DN25 (1")	DN20 (3/4")
AGS6020	DN32 (1 1/4")	DN25 (1")
AGS6025	DN32 (1 1/4")	DN32 (1 1/4")
AGS6030	DN40 (1 1/2")	DN32 (1 1/4")

Mounting and connection

Mounting


The air curtain is installed horizontally with the supply air grille facing downwards as close to the door as possible. A variety of installation options are available; brackets for wall mounting or threaded bars for ceiling mounting.

Design package for an installation with concealed mountings, cables and pipes is available as an option.

For the protection of wider doorways, several units can be mounted next to each other.

Connection

The PC board SIRE is built into the air curtain on delivery and is equipped with modular connectors for easy connection of external components. Read more about the SIRE control system in the "Controls" section.

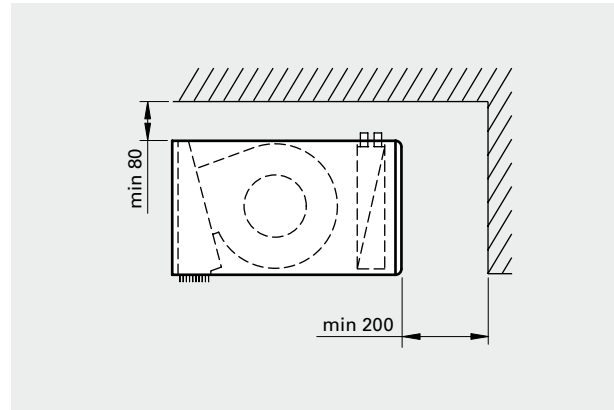

Minimum distances

Unit without heating

Operation (230V~) is connected to terminal block in the junction box on top of the unit.


Unit with water heating

Operation (230V~) is connected to terminal block in the junction box on top of the unit.

The water coil is connected via connections with dimensions as given in the table (see diagram) on top of the unit.



Accessories

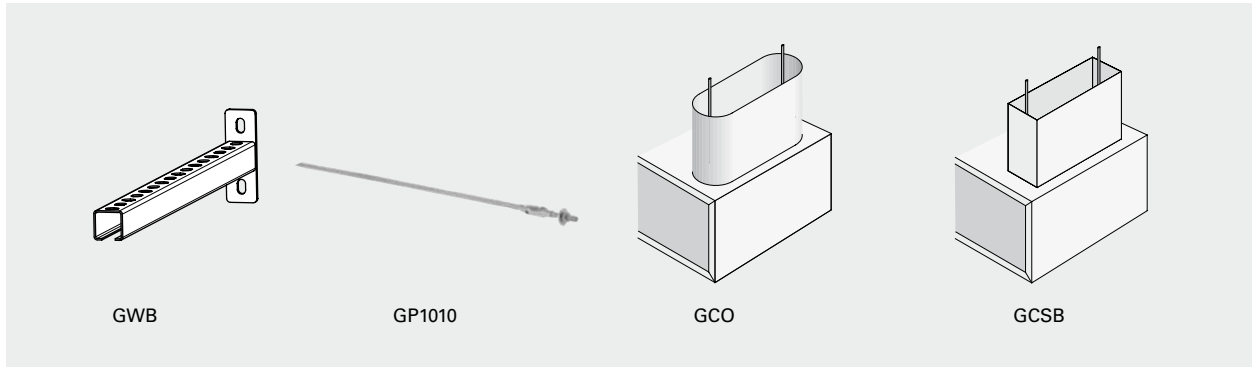

GWB640, wall bracket
 Brackets for installing unit horizontally on a wall. Two are required for 1 and 1.5 metre units, while 2 and 2.5 metre units need three and 3 metre units need four .


GP1010, threaded bar
 Threaded bar for mounting in ceilings. Length 1 m. M10. Four are required for 1 and 1.5 metre units, while 2 and 2.5 metre units need six and 3 metre units need eight.

GCO, oval design kit
 Used to conceal mountings, cables and pipes. Special order to required dimension.

GCSB, square design kit
 Used to conceal mountings, cables and pipes. Special order to required dimension.

Type	Description	Quantity included	Length
GWB640	Wall bracket	1 pc	400 mm
GP1010	Threaded bar	1 pc	1 m
GCO	Oval design kit		
GCSB	Square design kit		


Controls

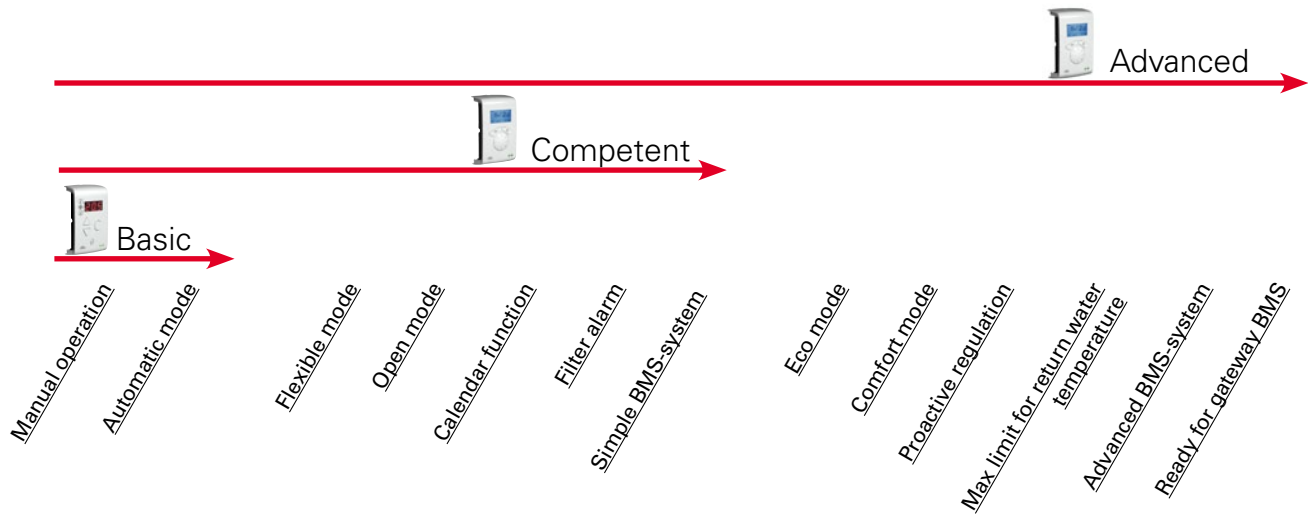

This air curtain is supplied with an integrated PC board SIRE. There are three different levels with different functionality to choose from, Basic, Competent or Advanced. Read more about the SIRE control system in the "Controls" section.

Type	Description
SIREB	Control system SIRE Basic
SIREAC	Control system SIRE Competent
SIREAA	Control system SIRE Advanced

Water control

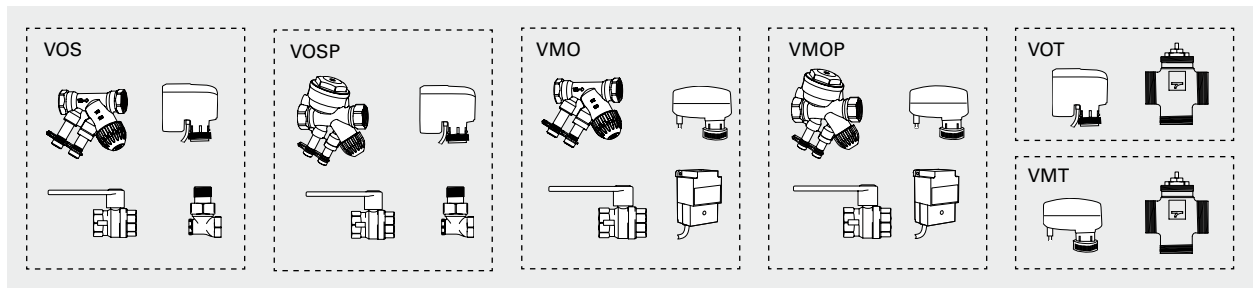

Valve kit VOS(P), VOT, VMO(P) or VMT is used to control the water flow. For more information see the "Controls" section.

Type	Description
VOS15LF	Valve kit on/off, low flow, DN15
VOS15NF	Valve kit on/off, DN15
VOS20	Valve kit on/off, DN20
VOS25	Valve kit on/off, DN25
VOSP15LF	Pressure independent valve kit, low flow, DN15
VOSP15NF	Pressure independent valve kit, DN15
VOSP20	Pressure independent valve kit, DN20
VOSP25	Pressure independent valve kit, DN25
VOT15	Three way control valve and actuator on/off, DN15
VOT20	Three way control valve and actuator on/off, DN20
VOT25	Three way control valve and actuator on/off, DN25

Type	Description
VMO15LF	Modulating valve kit, low flow, DN15
VMO15NF	Modulating valve kit, DN15
VMO20	Modulating valve kit, DN20
VMO25	Modulating valve kit, DN25
VMOP15LF	Pressure independent and modulating valve kit, low flow, DN15
VMOP15NF	Pressure independent and modulating valve kit, DN15
VMOP20	Pressure independent and modulating valve kit, DN20
VMOP25	Pressure independent and modulating valve kit, DN25
VMT15	Three way control valve and modulating actuator, DN15
VMT20	Three way control valve and modulating actuator, DN20
VMT25	Three way control valve and modulating actuator, DN25

Output charts water

AGS5000 WL

			Supply water temperature: 80 °C Room temperature: +18 °C Outlet air temperature: +35 °C*1				Water temperature: 80/60 °C Room temperature: +18 °C			
Type	Fan position	Airflow [m³/h]	Output [kW]	Return water temp. [°C]	Water flow [l/s]	Pressure drop [kPA]	Output*2 [kW]	Outlet air temp. [°C]	Water flow [l/s]	Pressure drop [kPA]
AGS5015WL	max	4800	27,4	36,6	0,15	1,0	43,6	45,0	0,53	6,6
	min	2400	13,8	34,6	0,08	0,3	27,5	52,0	0,34	3,7
AGS5020WL	max	7000	40,1	30,6	0,19	1,6	70,2	47,8	0,86	20,8
	min	3500	20,1	28,6	0,09	0,5	43,5	54,9	0,53	8,8
AGS5025WL	max	9400	53,8	31,5	0,27	3,2	90,5	46,6	1,11	37,3
	min	4700	26,8	26,0	0,12	0,8	56,6	53,8	0,69	16,1
AGS5030WL	max	11700	66,4	32,8	0,34	2,6	110,1	46,2	1,34	30,5
	min	5850	33,2	29,0	0,16	0,7	68,9	53,3	0,84	12,8

			Supply water temperature: 70 °C Room temperature: +18 °C Outlet air temperature: +35 °C*1				Water temperature: 70/50 °C Room temperature: +18 °C			
Type	Fan position	Airflow [m³/h]	Output [kW]	Return water temp. [°C]	Water flow [l/s]	Pressure drop [kPA]	Output*2 [kW]	Outlet air temp. [°C]	Water flow [l/s]	Pressure drop [kPA]
AGS5015WL	max	4800	27,4	39,7	0,22	1,8	34,4	39,3	0,42	5,7
	min	2400	13,7	34,6	0,09	0,4	21,8	44,9	0,26	2,5
AGS5020WL	max	7000	40,1	34,0	0,27	2,9	55,9	41,7	0,68	14,2
	min	3500	20,1	29,0	0,12	0,7	34,8	47,6	0,43	6,1
AGS5025WL	max	9400	53,7	35,2	0,38	5,8	72,4	40,9	0,88	25,6
	min	4700	26,8	27,2	0,15	1,2	45,4	46,7	0,55	11,2
AGS5030WL	max	11700	66,4	36,3	0,48	4,7	87,4	40,4	1,06	20,2
	min	5850	33,2	29,5	0,20	1,0	54,8	46,1	0,67	8,6

			Supply water temperature: 60 °C Room temperature: +18 °C Outlet air temperature: +35 °C*1				Water temperature: 60/40 °C Room temperature: +18 °C			
Type	Fan position	Airflow [m³/h]	Output [kW]	Return water temp. [°C]	Water flow [l/s]	Pressure drop [kPA]	Output*2 [kW]	Outlet air temp. [°C]	Water flow [l/s]	Pressure drop [kPA]
AGS5015WL	max	4800	27,4	43,7	0,41	5,7	25,0	33,5	0,30	3,3
	min	2400	13,7	34,6	0,13	0,8	16,1	37,9	0,19	1,5
AGS5020WL	max	7000	40,1	38,5	0,45	7,2	41,4	35,6	0,50	8,6
	min	3500	20,1	30,0	0,16	1,2	26,0	40,0	0,31	3,8
AGS5025WL	max	9400	53,8	40,0	0,65	15,6	53,7	35,0	0,65	15,6
	min	4700	26,8	30,6	0,22	2,4	33,8	39,4	0,41	6,9
AGS5030WL	max	11700	66,4	41,1	0,85	13,8	64,6	34,5	0,78	11,8
	min	5850	33,2	31,7	0,28	1,9	41,0	39,0	0,50	5,2

			Supply water temperature: 55 °C Room temperature: +18 °C Outlet air temperature: +35 °C*1				Water temperature: 55/35 °C Room temperature: +18 °C			
Type	Fan position	Airflow [m³/h]	Output [kW]	Return water temp. [°C]	Water flow [l/s]	Pressure drop [kPA]	Output*2 [kW]	Outlet air temp. [°C]	Water flow [l/s]	Pressure drop [kPA]
AGS5015WL	max	4800	27,4	46,0	0,74	16,6	20,2	30,5	0,24	2,3
	min	2400	13,7	36,4	0,18	1,3	13,1	34,2	0,16	1,1
AGS5020WL	max	7000	40,1	41,5	0,72	16,4	34,1	32,5	0,41	6,2
	min	3500	20,0	32,2	0,21	2,0	21,7	36,4	0,26	2,8
AGS5025WL	max	9400	53,7	43,3	1,11	40,5	44,2	32,0	0,53	11,2
	min	4700	26,8	33,1	0,30	4,0	28,3	35,9	0,34	5,1
AGS5030WL	max	11700	66,4	44,0	1,46	37,3	53,1	31,6	0,64	8,4
	min	5850	33,2	34,0	0,38	3,3	34,0	35,4	0,41	3,7

*1) Recommended outlet air temperature for good comfort and optimized output.

*2) Nominal output at given supply and return water temperature.

Output charts water

AGS6000 WL

			Supply water temperature: 80 °C Room temperature: +18 °C Outlet air temperature: +35 °C*1				Water temperature: 80/60 °C Room temperature: +18 °C			
Type	Fan position	Airflow [m³/h]	Output [kW]	Return water temp. [°C]	Water flow [l/s]	Pressure drop [kPA]	Output*2 [kW]	Outlet air temp. [°C]	Water flow [l/s]	Pressure drop [kPA]
AGS6010WL	max	4200	24,0	32,5	0,12	1,1	42,3	47,9	0,52	13,2
	min	2100	12,0	31,5	0,06	0,3	26,4	55,3	0,32	5,7
AGS6015WL	max	6500	37,2	41,7	0,24	2,0	52,4	42,0	0,64	12,1
	min	3250	18,6	33,8	0,10	0,4	33,9	49,0	0,41	5,5
AGS6020WL	max	8500	48,6	33,2	0,25	2,5	79,4	45,8	0,97	26,0
	min	4250	24,4	27,9	0,11	0,6	49,9	52,9	0,61	11,3
AGS6025WL	max	10600	60,6	33,1	0,31	4,2	97,8	45,4	1,19	42,9
	min	5300	30,3	26,0	0,14	1,0	61,6	52,5	0,75	18,7
AGS6030WL	max	12600	72,0	34,0	0,38	3,1	116,2	45,4	1,42	33,7
	min	6300	36,0	28,7	0,17	0,6	73,0	52,4	0,89	14,2

			Supply water temperature: 70 °C Room temperature: +18 °C Outlet air temperature: +35 °C*1				Water temperature: 70/50 °C Room temperature: +18 °C			
Type	Fan position	Airflow [m³/h]	Output [kW]	Return water temp. [°C]	Water flow [l/s]	Pressure drop [kPA]	Output*2 [kW]	Outlet air temp. [°C]	Water flow [l/s]	Pressure drop [kPA]
AGS6010WL	max	4200	24,0	35,5	0,17	1,9	33,5	41,7	0,41	8,9
	min	2100	12,0	31,4	0,08	0,8	21,0	47,7	0,26	7,2
AGS6015WL	max	6500	37,2	45,0	0,36	4,4	41,3	36,9	0,50	8,0
	min	3250	18,6	34,5	0,13	0,7	26,8	42,5	0,33	3,7
AGS6020WL	max	8500	48,6	36,8	0,36	4,6	63,1	40,1	0,77	17,6
	min	4250	24,4	28,8	0,14	1,0	39,7	45,8	0,48	7,7
AGS6025WL	max	10600	60,6	37,0	0,44	7,8	77,8	39,8	0,95	29,2
	min	5300	30,3	28,2	0,18	1,6	49,1	45,5	0,60	12,9
AGS6030WL	max	12600	72,0	37,7	0,54	6,0	92,1	39,7	1,12	22,3
	min	6300	36,0	29,5	0,21	1,0	58,1	45,4	0,71	7,6

*1) Recommended outlet air temperature for good comfort and optimized output.

*2) Nominal output at given supply and return water temperature.

Output charts water

AGS6000 WL

			Supply water temperature: 60 °C Room temperature: +18 °C Outlet air temperature: +35 °C*1				Water temperature: 60/40 °C Room temperature: +18 °C			
Type	Fan position	Airflow [m³/h]	Output [kW]	Return water temp. [°C]	Water flow [l/s]	Pressure drop [kPA]	Output*2 [kW]	Outlet air temp. [°C]	Water flow [l/s]	Pressure drop [kPA]
AGS6010WL	max	4200	24,0	39,4	0,28	4,8	24,5	35,3	0,30	5,3
	min	2100	12,0	31,6	0,10	1,0	15,5	39,9	0,19	4,1
AGS6015WL	max	6500	37,2	49,2	0,83	20,2	29,9	31,6	0,36	4,6
	min	3250	18,6	38,0	0,21	1,7	19,6	35,9	0,24	2,2
AGS6020WL	max	8500	48,6	41,8	0,65	13,5	46,7	34,3	0,56	10,6
	min	4250	24,3	31,8	0,21	1,9	29,9	38,9	0,36	4,8
AGS6025WL	max	10600	60,6	42,2	0,83	23,6	57,7	34,2	0,70	17,6
	min	5300	30,3	32,0	0,26	3,2	37,1	38,8	0,45	8,1
AGS6030WL	max	12600	72,0	42,5	1,00	18,4	68,0	34,0	0,82	13,0
	min	6300	36,0	32,6	0,32	2,0	43,6	38,5	0,53	4,7

			Supply water temperature: 55 °C Room temperature: +18 °C Outlet air temperature: +35 °C*1				Water temperature: 55/35 °C Room temperature: +18 °C			
Type	Fan position	Airflow [m³/h]	Output [kW]	Return water temp. [°C]	Water flow [l/s]	Pressure drop [kPA]	Output*2 [kW]	Outlet air temp. [°C]	Water flow [l/s]	Pressure drop [kPA]
AGS6010WL	max	4200	24,0	41,7	0,44	10,6	19,9	32,1	0,24	3,7
	min	2100	12,0	33,0	0,13	2,2	12,8	36,1	0,16	2,9
AGS6015WL	max	6500	–	–	–	–	24,0	29,0	0,29	3,1
	min	3250	18,6	40,2	0,30	3,4	15,9	32,6	0,19	1,5
AGS6020WL	max	8500	48,6	45,0	1,18	39,4	38,4	31,4	0,46	7,7
	min	4250	24,4	34,3	0,28	3,2	24,7	35,3	0,30	3,5
AGS6025WL	max	10600	60,6	45,7	1,58	75,7	47,6	31,3	0,58	12,8
	min	5300	30,3	34,5	0,36	5,5	30,7	35,2	0,37	5,9
AGS6030WL	max	12600	72,0	45,7	1,88	59,6	55,9	31,2	0,68	9,2
	min	6300	36,0	35,1	0,44	3,4	36,0	35,0	0,44	3,4

– = at the current water temperatures and airflows, the air outlet temperature will be less than 35 °C.


*1) Recommended outlet air temperature for good comfort and optimized output.

*2) Nominal output at given supply and return water temperature.

Wiring diagrams

Internal wiring diagram

AGS5015/5020/5025
AGS6010/6015/6020

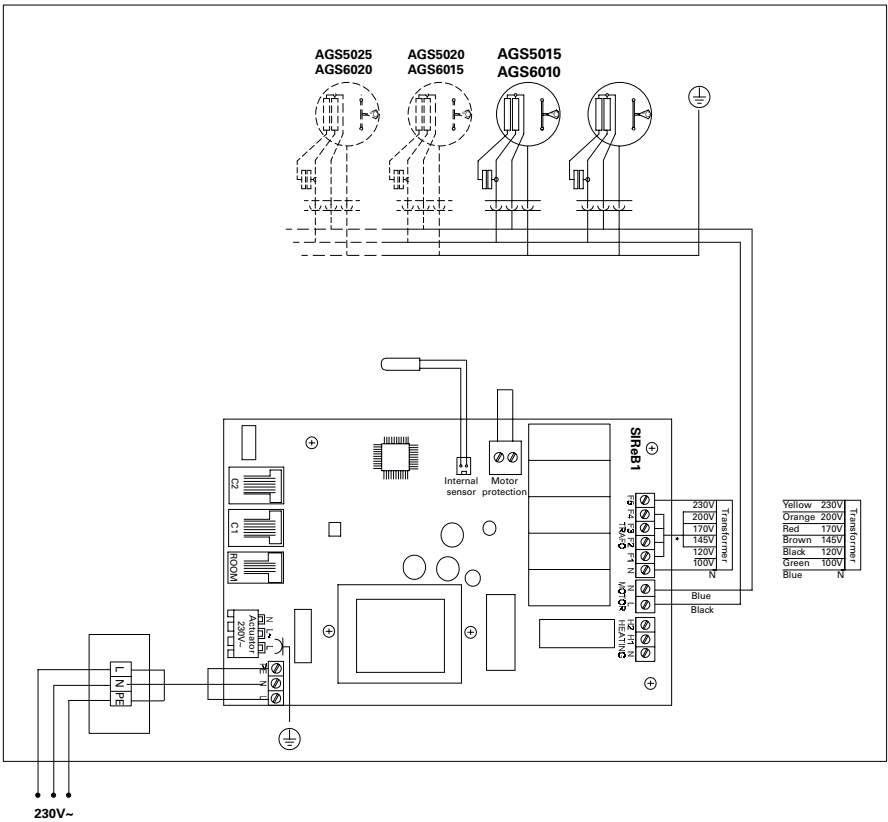

AGS5030
AGS6025/6030

