

IGC-LI


Circular external louver



The IGC-LI is a round weather protection grille for installation in exterior walls. The grid is used in ductwork for supply and exhaust air.

The grid is 100-315mm in sizes DN available and has a mesh bird screen.

Dimensions

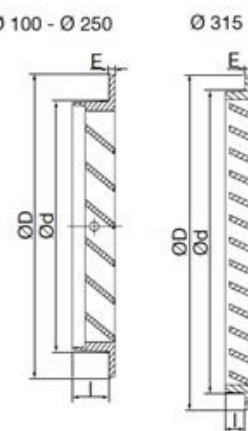


Design

The grid is made of aluminum. The fin spacing is 20mm. The inclination of the slats is 35 °. The underlying Birds screen made of stainless steel. Mesh width 10×10 mm.

Mounting

The grid is plugged directly into the pipeline and can be mounted through the provided holes in the frame with the pipeline.

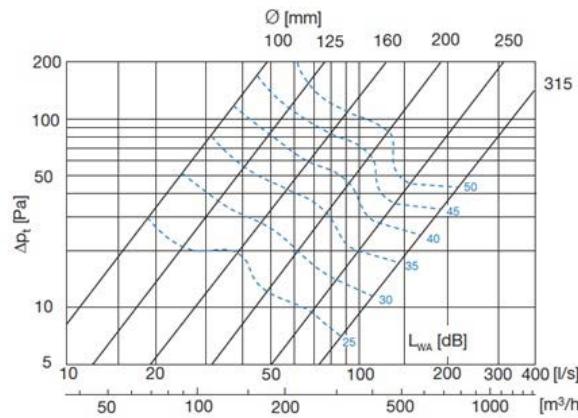

	ød mm	øD mm	I mm	E mm	Af m ²	kg
IGC-LI-100	100	131	22,0	3,5	3,5	0,17
IGC-LI-125	125	151	22,5	3,5	3,5	0,25
IGC-LI-160	160	188	21,5	3,5	3,5	0,39
IGC-LI-200	200	230	21,5	3,5	3,5	0,51
IGC-LI-250	250	278	24,5	3,5	3,5	0,83
IGC-LI-315	315	350	15,5	6,5	6,5	1,81

Ø D = outside diameter
Ø d = connection diameter