



Eaton eATS Monitored

15- and 20-amp rack automatic transfer switches

The Eaton® eATS Monitored models enable you to seamlessly switch non-phase synchronized AC power sources in the event of a power failure.

Generally used to provide power redundancy to equipment with a single power supply, the eATS automatically transfers power between sources with no interruption.

The eATS can create a redundant environment ensuring your critical equipment remains operational at all times. Remotely monitor alerts, provide redundant power and keep mission critical applications running with this reliable and easy-to-use solution.



Dual inputs and 10 outputs deliver redundant power to allow continuous uptime to your critical equipment



- 1 Graphical LCD signifies which source is being output
- 2 Test button can be used to manually force transfer
- 3 Network card supports IPv6 and provides remote monitoring capabilities via web browser or SNMP

Features:

Graphical LCD

The LCD simplifies eATS monitoring by displaying current and voltage monitoring to prevent overloading the PDU, identifying which source is being output and providing alarm warnings.

Network connection

The included communication card provides remote monitoring capabilities. In the event of a power drop, you will be alerted by email or via your management software. The eATS allows you to continue running on the B feed but alerts you of issues with the A feed.


Fast transfer time

Eaton's network-connected eATS Monitored solution delivers a fast 10 millisecond transfer time to ensure power supplies stay on during transfer and critical equipment stays operational.

Out-of-phase transfer


The eATS Monitored safely transfers non-synchronous power sources. As a result, you gain peace of mind knowing the Eaton eATS can be installed anywhere regardless of phase wiring, without worrying about damage due to out of sync sources.

Dual-feed UPS:

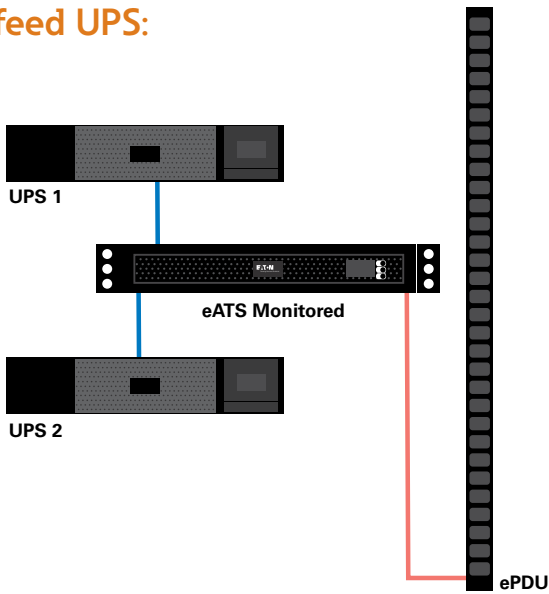


eATS Monitored manages input from a pair of UPSs to create a redundant environment ensuring system uptime

UPS bypass:

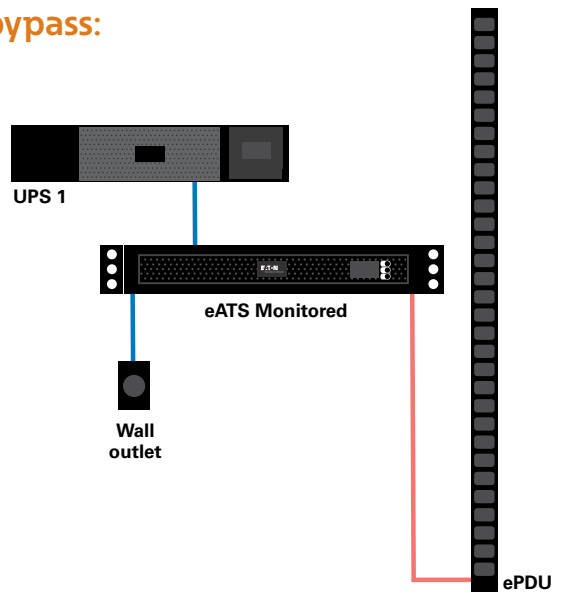


eATS Monitored can be used as a bypass to perform UPS maintenance without losing power to critical applications

Dual-feed PDU:

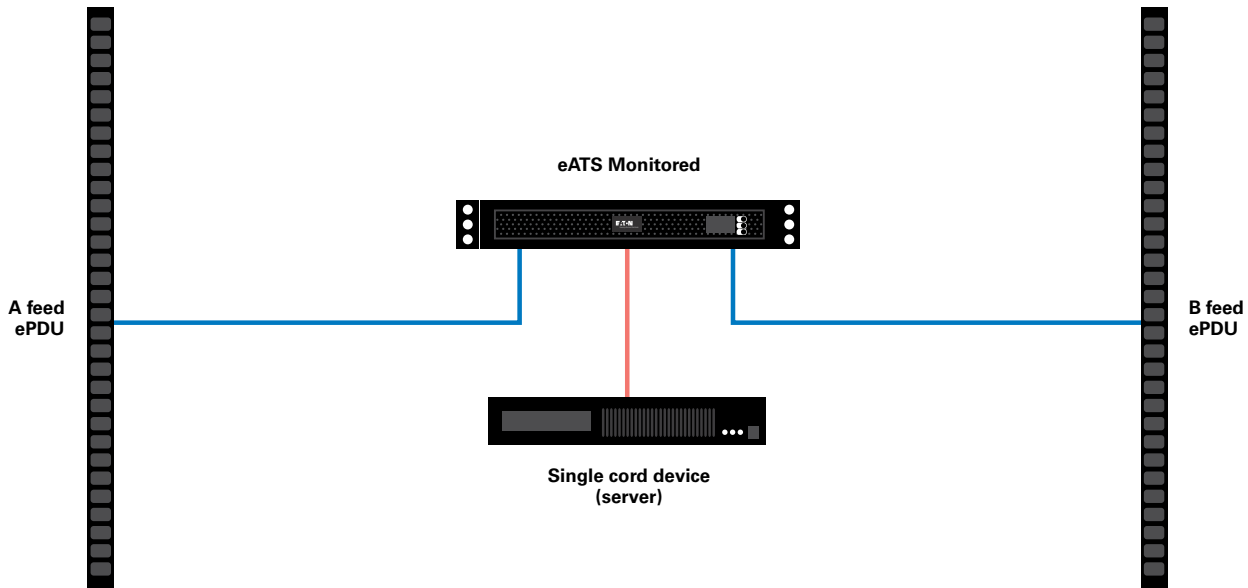

Dual redundancy created for a single output device using A and B feed ePDUs



EATON eATS MONITORED TECHNICAL SPECIFICATIONS

Catalog number	Power input	Voltage (V)	Current	Max kW	Cord (ft)	Output	Dimensions (H x W x D) (in)
EATS115	NEMA 5-15P	120V	12A	1.44	10	NEMA 5-15R	1.7 (1U) x 17.25 x 9.84
EATS120	L5-20P and 5-20P adapter in box	120V	16A	1.92	10	NEMA 5-20R	1.7 (1U) x 17.25 x 9.84
EATS220	L6-20P and C20 cords	100-240V	16A	3.33	10	IEC 60320 C13	1.7 (1U) x 17.25 x 9.84

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States

© 2015 Eaton
All Rights Reserved
Printed in USA
BR155014EN / GG
October 2015

EATON
Powering Business Worldwide

For more information about the eATS monitored, please visit: Eaton.com/eATS

Eaton is a registered trademark.
All other trademarks are property of their respective owners.