

Spring-return actuator, combined with external temperature fuse, for fire and smoke dampers 90° in ventilation and air-conditioning systems, with connection plugs for simple integration in control and monitoring systems or bus networks via communication and power supply units

- Nominal torque 18 Nm / 12 Nm
- Nominal voltage AC/DC 24 V
- Control open-close
- Damper rotation form fit 12 mm (10 mm with enclosed adapter)


**Technical data**

<b>Electrical data</b>	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2 V ... 28.8 V / DC 21.6 V ... 28.8 V
	Power consumption in operation	7 W
	Power consumption at rest	2 W
	Power consumption for wire sizing	10 VA
	Power consumption for wire sizing note	I <sub>max</sub> 8.3 A @ 5 ms
	Auxiliary switch	2 x SPDT
	Switching capacity auxiliary switch	Contact gold-plated silver: 1 mA ... 6 (3) A, DC 5 V ... AC 250 V (II Totally insulated)
	Switching points auxiliary switch	5° / 80°
	Connection supply	Cable 1 m, 2 x 0.75 mm <sup>2</sup> (halogen-free)
	Connection auxiliary switch	Cable 1 m, 6 x 0.75 mm <sup>2</sup> (halogen-free)
	Connection plug	Supply / control: 3-pole plug, suitable for communication and power supply units (see "Accessories") Auxiliary switch: 6-pole plug, suitable for communication and power supply units (see "Accessories")
	<b>Functional data</b>	Torque motor
Torque spring-return		Min. 12 Nm
Direction of rotation motor		Can be selected by mounting L / R
Angle of rotation		Max. 95° (incl. 5° initial spring tension)
Running time motor		<120 s / 90°
Running time spring-return		~16 s (tamb = 20°C)
Sound power level motor max.		45 dB (A)
Sound power level spring-return max.		63 dB (A)
Damper rotation		Form fit 12 mm (10 mm with enclosed adapter)
Position indication		Mechanically, with pointer
Service life		Min. 60,000 safety positions
<b>Safety</b>	Response temperature thermal fuse	Tf1: Duct outside temperature 72°C
	Protection class IEC/EN	III Safety extra-low voltage
	Degree of protection IEC/EN	IP54 in all mounting positions
	EMC	CE according to 2004/108/EC
	Low-voltage directive	CE according to 2006/95/EC
	Certification IEC/EN	Certified according to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1.AA.B
	Rated impulse voltage supply / control	0.8 kV
	Control pollution degree	3
	Ambient temperature normal duty	-30°C ... 50°C
	Ambient temperature safety duty	The safety position will be attained up to max. 75°C
	Non-operating temperature	-40°C ... 50°C
	Ambient humidity	95% r.h., non-condensing
	Maintenance	Maintenance-free
<b>Weight</b>	Weight approx.	2.8 kg

## Safety notes



- The actuator is not allowed to be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- The actuator is adapted and mounted to the fire and smoke damper by the damper manufacturer. For this reason, the actuator is only supplied direct to safety damper manufacturers. The manufacturer then bears full responsibility for the proper functioning of the damper.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

## Product features

<b>Mode of operation</b>	The actuator moves the damper to the operating position while tensioning the return spring at the same time. The damper is turned back to the safety position by spring energy when the supply voltage is interrupted.
<b>External thermal fuse</b>	If the ambient temperature of 72°C is exceeded, the thermal fuse Tf1 responds. The function of the thermal fuse and the test button is only warranted if the actuator is connected to the power supply and has reached its operating position.
<b>Signalling</b>	Two microswitches with fixed settings are installed in the actuator for indicating the damper end positions. The position of the damper blade can be read via a mechanical position indicator.
<b>Manual operation</b>	Without power supply, the damper can be operated manually and fixed in any required position. It can be unlocked manually or automatically by applying the supply voltage.
<b>Connecting</b>	The actuator is equipped with a connection plug. This means that it can be integrated via a communication and power supply unit (see "Accessories") in the control and monitoring systems (e.g. SBS control) or in bus networks (e.g. MP bus solutions). Connection plug




## Accessories

	Description	Data sheet name
<b>Electrical accessories</b>	Thermoelectric tripping devices	BAE72
	Thermoelectric tripping devices with control key	BAE72-F-ST
		BAE72-S
		BAE72-S-F-ST
	Auxiliary switch, 2 x SPDT, 6 A (2.5 A), AC 250 V	SN2-C7
	Cable set with plug, L = 0.5 m for BF.. and BLF.. on communication and power supply units	ZST-BS
	Communication and power supply unit for integration in SBS control networks	BKN230-24
	Communication and power supply unit for integration in SBS control and MP bus networks	BKN230-24-C-MP
<b>Mechanical accessories</b>	Adapter with clamp for rotary axes up to 20 mm for BF.. and BLF..	ZK-BF
	Adapter with DM18 rotary axis, L = 33 mm for BF.. and BLF..	ZA18-BF
	Adapter 12/8 mm for BF.. and BLF..	ZA8-BF
	Adapter 12/11 mm for BF.. and BLF..	ZA11-BF
	Bracket for SN2-C7 auxiliary switch for BF.. and BR..	ZSN-BF

**Electrical installation**

**Wiring diagrams**

**Connection by means of plug at communication and power supply units**

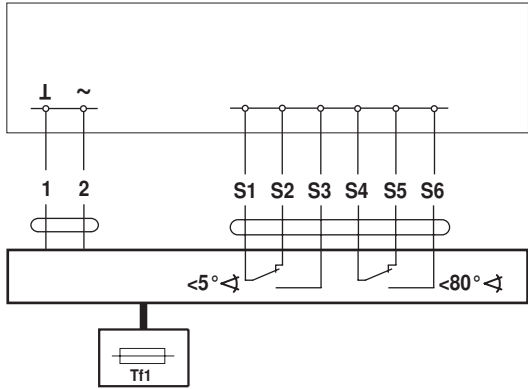

Application examples for the integration into monitoring and control systems or into bus networks can be in the documentation of the connected communication and power supply unit (see "Accessories").

**Dimensions [mm]**

**Dimensional drawings**

